
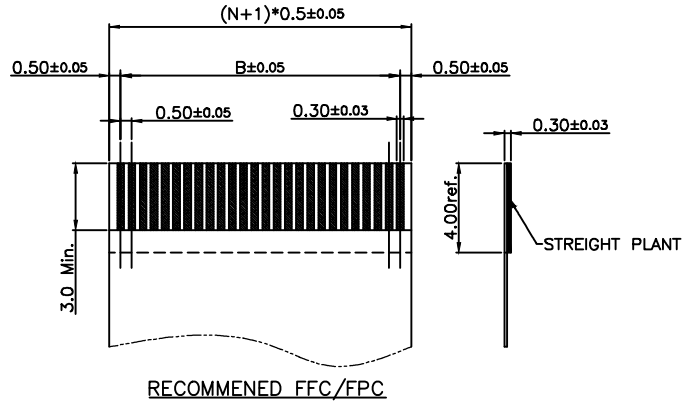




RoHS
Compatible

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

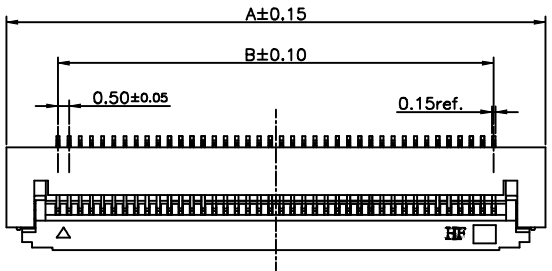



Order information :
FP0501H-XXX X X X
1 2 3 4 5

- With "H" : Halogen free
- Pin No.
- Packing :
0 = Tape & Reel
1 = Tube
- Plating spec :
M = MATTE Sn
B = Bright Sn
G = Gold flash
0 = Gold flash on contact area and Matte Sn solder area
1 = Au Plated 1U"
2 = Au Plated 2U"
3 = Au Plated 3U"
- Color :
0 = Housing(Nature)+Cover(Black)
1 = Housing(Black)+Cover(Black)

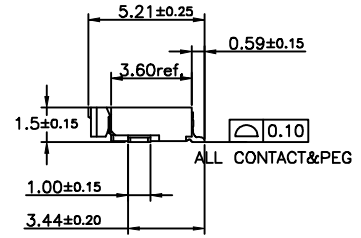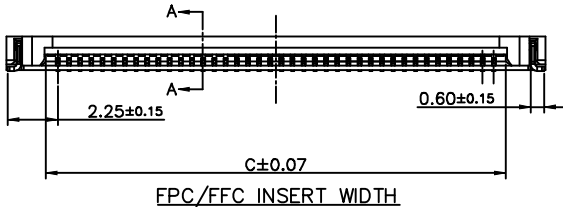

Specifications

- Current Rating : 0.5A AC/DC
- Voltage Rating : 50V AC/DC
- Operating temperature : -45°C~+85°C

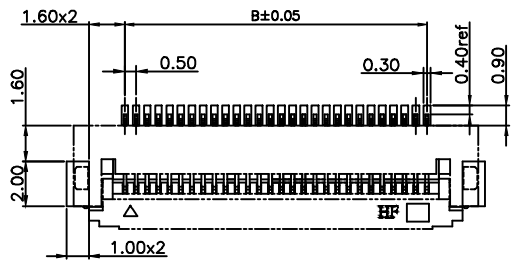

N = 060	A = 34.10	B = 29.50	C = 30.57
N	A = B+6.10	B = (N-1)*0.50	C = B+1.07
N = 004	A = 6.10	B = 1.50	C = 2.57
PIN NO.	DIM. A	DIM. B	DIM. C

4	Peg	Copper alloy	1	_____
3	Contact	Copper alloy	1	_____
2	Cover	High-temp	1	UL94 V-0
1	Housing	High-temp	1	UL94 V-0
No.	Part Name	Material	Qty	Finishing

RECOMMENED P.C.B LAYOUT

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	FPC 0.5mm Pitch 1.5H
0	_____ ±0.35	PART NO	FP0501H Series
0.0	_____ ±0.25	DRAWING NO	
0.00	_____ ±0.15	DATE	2020.02.26
ANGLE	_____ ±3°		