




▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D  
2019.01.15  
達立




**RoHS**  
**Compatible**

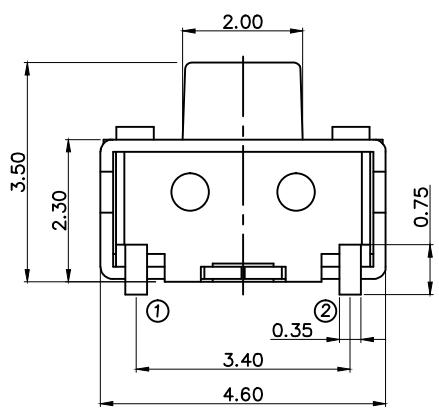

CIRCUIT DIAGRAM



RECOMMENED P.C.B MOUNTING PATTERN DIMENSION

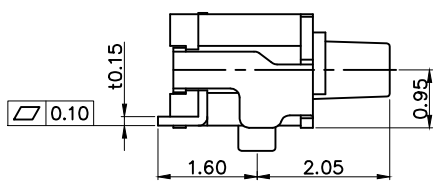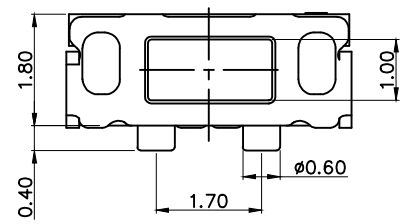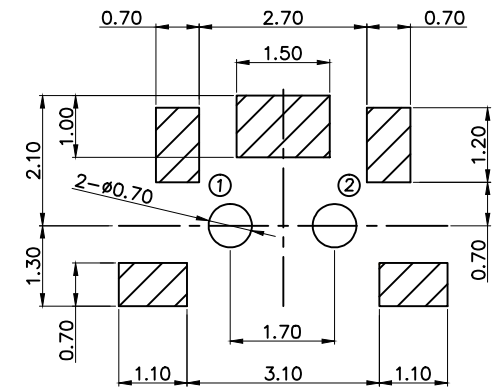

Specifications

1. Rating : DC 12V, 50mA.
2. Travel : 0.20±0.10mm
3. Contact resistance : 100mΩ Max.
4. Insulation resistance : 100MΩ Min.
5. Operating force : 160±50gf
6. Operating life : 100,000 cycles Min.

5	Contact	SUS	1	Ag Clad 0.35μm
4	Stem	LCP	1	Black
3	Cover	Phosphor Bronze	1	Ag Plated 0.20μm
2	Terminal	Phosphor Bronze	1	Ni under plated 0.20μm and Ag plated 0.25μm. over all.
1	Case	LCP	1	White
No.	Part Name	Material	Q'ty	Finishing

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Eason	SCALE		
DRAWING	Eason	UNIT	mm	
CHECK	Eason	SIZE	A4: 210*297	
APPROVAL	Honda	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
0 ±0.35	PART NO	TS-A00-2-S085
0.0 ±0.30	DRAWING NO	
0.00 ±0.20	DATE	2019/01/15
ANGLE ±3°		