


ALL mXTEND™ (NN02-220)

The ALL mXTEND™ chip antenna component has been specifically designed for providing multiband performance in mobile applications, such as LTE (698 – 960MHz and 1710 – 2690MHz) that enables **worldwide coverage**. Among other applications, it is used for designing **Smart Meters** and **Sharkfin** devices able to operate in full mobile communication standards.

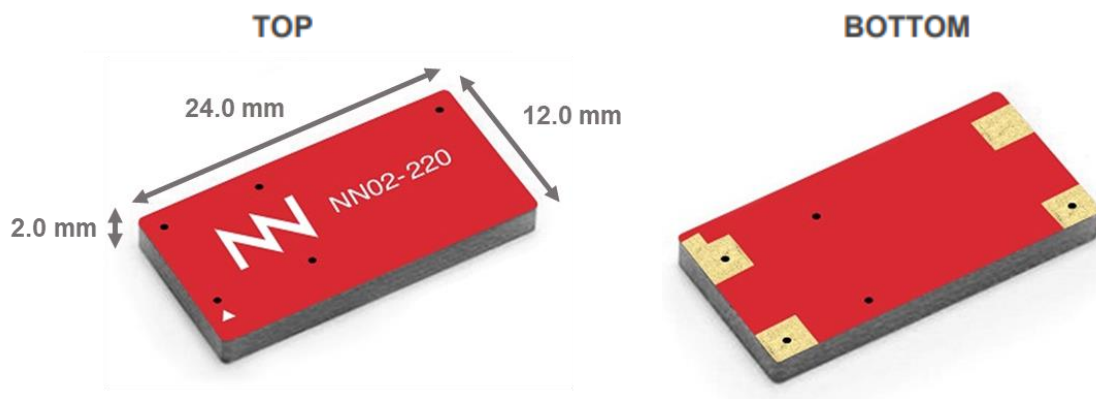

Product Benefits

- **High Performance:** A global cellular antenna for IoT and mobile devices with a high performance in the subGHz frequency range.
- **Multiband:** All cellular bands covered: 2G/3G/4G/5G and NB-IoT/LTE-M applications in a 24.0 mm x 12.0 mm x 2.0 mm antenna package.
- **Global reach:** Through multiband performance (worldwide standards compatible).
- **Reliability:** Off-the-Shelf standard product, no antenna part customization (electronic optimization).
- **Use cases:** Smart metering, smart city sensors, automotive.

Operation Bands Summary

- GSM, UMTS, LTE (698 – 960MHz and 1710 – 2690MHz)

1. AVAILABLE SOLUTIONS SUMMARY

Class	Frequency Regions	Frequency range	More detailed info
1 Port	2	698 – 960 MHz & 1710 – 2690 MHz	<u>Cellular Mobile</u>
1 Port	2	698 – 960 MHz & 1710 – 2690 MHz	<u>Cellular for Smart Meters</u>
1 Port	2	698 – 960 MHz & 1710 – 2690 MHz	<u>Cellular for Sharkfin automotive</u>

2. DETAILED AVAILABLE SOLUTIONS

2.1. LTE SOLUTION

Technical features	698 – 960 MHz	1710 – 2690 MHz
Average Efficiency	> 55 %	> 75 %
Peak Gain	2.3 dBi	3.1 dBi
VSWR	< 3:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	1.23 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	24.0 mm x 12.0 mm x 2.0 mm	

Technical features. Measures from the evaluation board (131 mm x 60 mm x 1 mm).

2.2. LTE for Smart Meters SOLUTION

Technical features	698 – 960 MHz	1710 – 2690 MHz
Average Efficiency	> 65 %	> 70 %
Peak Gain	2.2 dBi	0.1 dBi
VSWR	< 3:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	1.23 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	24.0 mm x 12.0 mm x 2.0 mm	

Technical features. Measures from the evaluation board (145 mm x 130 mm x 1 mm).

2.3. LTE for Sharkfin automotive SOLUTION

Technical features	698 – 960 MHz	1710 – 2690 MHz
Average Efficiency	> 35 %	> 60 %
Peak Gain	1.8 dBi	7.1 dBi
VSWR	< 4.5:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	1.23 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	24.0 mm x 12.0 mm x 2.0 mm	

Technical features. Measures from the evaluation board (40 mm x 40 mm x 1 mm) mounted at a centre of metallic ground plane of 600 mm x 600 mm.

If you need assistance to design your matching network, please contact support@fractusantennas.com

You can also try our free of charge¹ **NN Wireless Fast Track service** you will receive a tailored antenna design approach for free in 24h¹. discover the feasibility of your next wireless project including the antenna!

¹ See terms and conditions for a free NN Wireless Fast-Track service in 24h at: <https://www.fractusantennas.com/fast-track-project/>